

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
17 March 2005 (17.03.2005)

PCT

(10) International Publication Number
WO 2005/024202 A1


- (51) International Patent Classification⁷: **F02B 37/10**, (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/EP2003/009877
- (22) International Filing Date: 5 September 2003 (05.09.2003)
- (25) Filing Language: English (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **HONEYWELL INTERNATIONAL INC. [US/US]**; 101, Columbia Road, Morristown, NJ 07962 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **NOELLE, Philippe** [FR/FR]; 32 Pavillon Vincey Bourget, F-88450 Vincey (FR).
- (74) Agents: **LESON, Thomas, Johannes, Alois et al.; TBK-Patent**, Bavariaring 4-6, 80336 München (DE).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELECTRIC POWER CONNECTION FOR ELECTRICALLY ASSISTED TURBOCHARGER

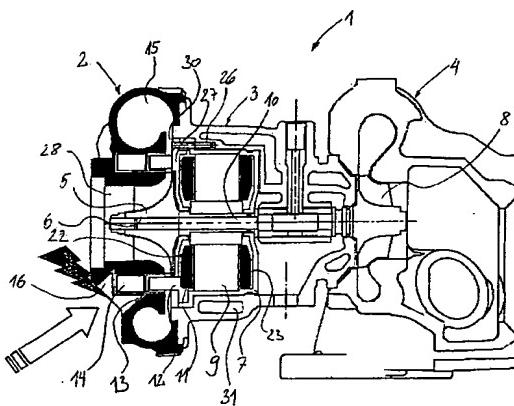

(57) Abstract: A turbocharger comprises a compressor housing (2) for accommodating a compressor wheel (5) drivable by an electric motor (21) and an electric motor (21) for driving a compressor wheel (5) accommodated in a compressor housing, said electric motor being supplied with electric power through at least one motor plug connector (12). The turbocharger further comprises a turbine housing (4), a center housing (3) for accommodating a shaft (6). The compressor wheel is driven by the turbine wheel (8) via the shaft (16) and can additionally be driven by the electric motor, wherein the compressor housing further comprises at least one main power plug connector (16) connectable to an electric power source and at least one housing plug connector (13) electrically connected to a respective one of the main power plug connector for supplying said electric motor with electric power. The said housing plug connector is disposed on an axial side of said compressor housing, facing said electric motor, and said motor plug connector is disposed on an axial side of said electric motor, facing said compressor housing.

WO 2005/024202 A1